


Features

- Gigabit Ethernet interface, providing 1Gbps bandwidth with a maximum transmission distance of 100m;
- 256MB on-board cache for data transmission or image resend;
- Support Software Trigger/Hardware Trigger/Free Run Mode;
- Support ISP functions including Gamma/LUT/BlackLevel Correction/TargetBrightness/Contrast,FFC,Denoising Sharpness etc.;
- Support multiple image data formats output/ROI/Binning(Including Pixel arbitrary scaling)/Mirror/ AutoFunction/Compress/Sequencer etc.;
- Conform to GigE Vision V2.0 protocol and GenICam standard;
- Conform to CE/UKCA/UL/KC,RoHS;

I Dimensions (mm)

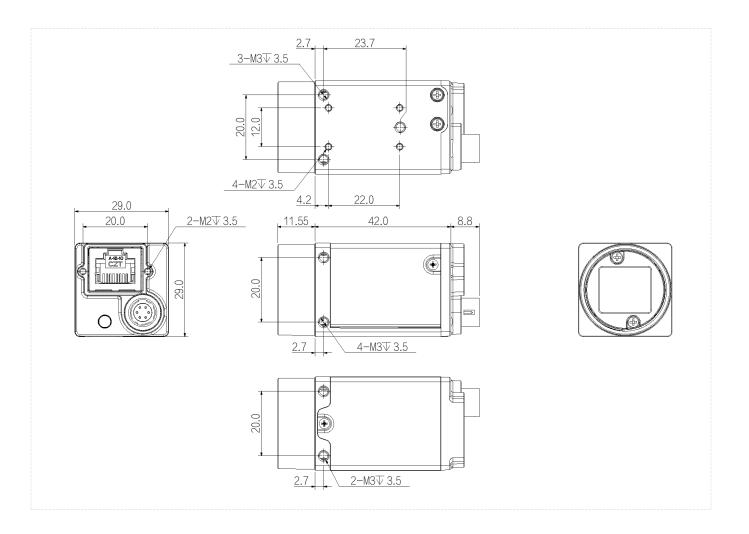

Specification

Model		AH3B00MG000E	
Basic	Sensor	IMX183	
	Image Sensor	1"CMOS	
	Shutter	Rolling/GlobalResetRealease	
	Resolution	5472 × 3648	
	Frame Rate	5.9 fps (10 fps @Compression Mode Burst)	
	Bit Depth	12	
	Mono/Color	Mono	
	Pixel Size	2.4 μm × 2.4 μm	
	Pixel	20.0 MP	
	S/N Ratio	41 dB	
	Dynamic Range	68.3 dB	
	Image Format	Mono8/10/10Packed/Mono12/Mono12Packed	
	Binning	off/onebytwo/twobyone/twobytwo/onebyfour/fourbyone/twobyfour/fourbytwo/f ourbyfour/ThreebyThree/onebySix/SixbyOne/SixbySix	
	ROI	Support	
Image	X Flip	Support	
	Y Flip	Support	
	Gain	1~32X	
	Gamma	From 0 to 3.99998, support LUT	
	Exposure Time	43.76 μs ~ 2.5sec	
	Trigger Mode	Software Trigger/Hardware Trigger/Free Run Mode	
	SPC	Support	
Performance	User Setting	Support three sets of user-defined configurations	
	Image Buffer	256MB	
	Port	GigE, PoE	
Port	GPIO Interface	1× 6 pin Hirose: 1× Opto-isolated input, 1× Opto-isolated output, 1 configurable input and output	
	Lens Mount	C-mount	
Power	Power Supply	PoE/ DC 9V~24V power supply via Hirose interface	
	Power Consumption	12 VDC≈2.1W(Typ.)	
Characterist	Product Dimensions	29 mm×29 mm×42 mm (not including lens mount and rear case connector)	
Structure	Net Weight	98 g	
	Storage Temperature	-30°C ~ +80°C	
Environment	Operating Temperature	0°C ~ +50°C	

RAYPLE



Connector Pin-out

Pin	Description	Features	Definition of 6-pin power port
1	-	+9VDC to 24VDC power supply	
2	Line1	Opto-isolated input	
3	Line2	GPIO (I/O can be configured for non-isolated software) ¹	
4	Lineo	Opto-isolated output	
5	-	Opto-isolated signal ground (ISO_GND)	
6	-	Camera DC power ground and GPIO signal ground (GND)	

Spectrogram

