
5000 series L5027MG140E



Features

- Support brightness enhancement, gamma correction, LUT and other ISP functions;
- Support PRNU correction in target bright field;
- Support various image formats of output data;
- Support DC12~24V wide-range power supply;
- Conform to CE, FCC certifications;

Dimensions (mm)

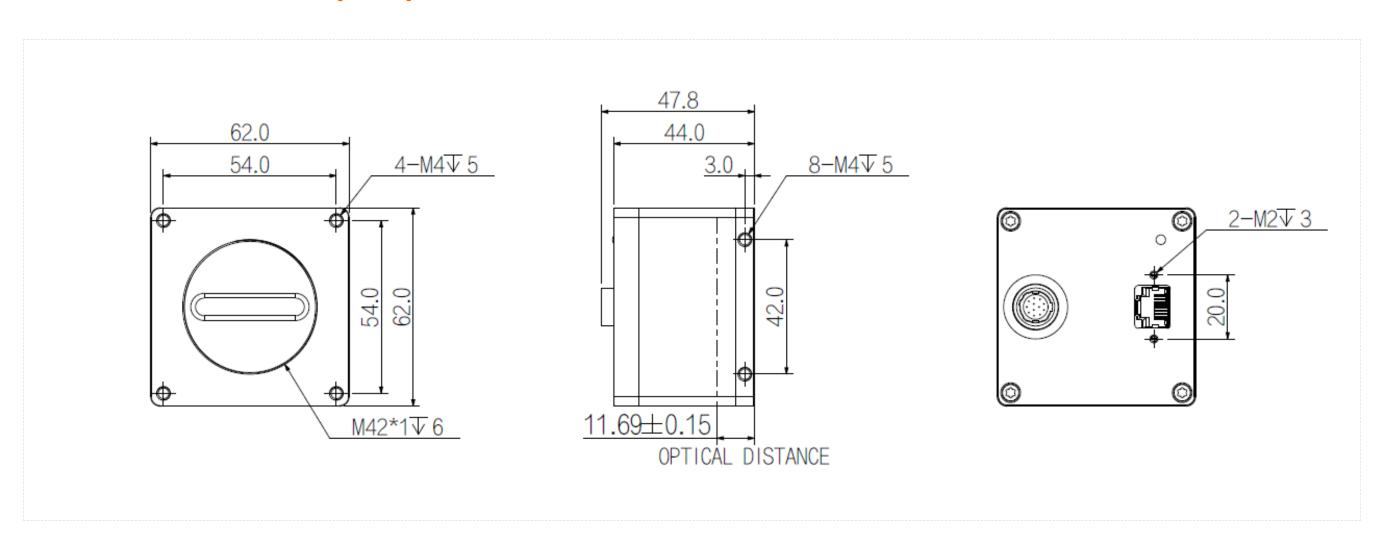



Specification

Model		L5027MG140E
	Sensor	2K
	Image Sensor	CMOS
	Shutter	Global
Davis.	Resolution	2048 × 1
Basic	Line Rate	49 kHz
	Bit Depth	12
	Mono/Color	Mono
	Pixel Size	14 μm × 14 μm
	S/N Ratio	>39dB
	Dynamic Range	66dB
	Image Format	Mono8/10/12/10Packed/12Packed
	ROI	Support
Tracere	X Flip	Support
Image	Gain	1~32
	Gamma	From 0 to 4, support LUT
	Exposure Time	8μs~100ms
	Trigger Mode	Software Trigger/Hardware Trigger/Free Run Mode
	FPN	Support
Darfarmanaa	User Setting	Support two sets of user-defined configurations
Performance	Image Buffer	64MB image cache , 64MB data cache
Port	Port	GigE
	GPIO Interface	12-pin Hirose interface for external power supply and external triggering; 2 differential/single-ended inputs, 1 differential configurable input or output, 1 high-speed optocoupler single-ended input, 1 GPIO configurable input or output
	Lens Mount	M42 x 1
Davis	Power Supply	DC 12~24V power supply via 12-pin Hirose connector
Power	Power Consumption	≈4.5W
Chrisations	Product Dimensions	62 mm × 62 mm × 44 mm (Not including rear case connector)
Structure	Net Weight	245 g
Environment	Storage Temperature	- 30°C~+80°C
Environment	Operating Temperature	- 30°C~+50°C



Connector Pin-out

Pin	Description	Features	
1	Power GND	Power ground	Port definitions of 12-pin signals
2	Camera Power	Power Supply	
3	IN Line1+	Input Line1+	
4	IN Line1-	Input Line1-	
5	Signal GND	Signal ground	
6	IN Line2+	Input Line2+	
7	IN Line2-	Input Line2-	
8	IN Line4	Bidirectional GPIO Line4	
9	IN/OUT Line3+	Configurable input/output Line3+	
10	IN/OUT Line3-	Configurable input/output Line3-	
11	OPT_IN Line5	Opto-isolated input Line5	
12	OPT GND	Opto-isolated ground point	

Spectrogram

