5000 series


L5087MK470E



Features

- CameraLink supports Full, Medium, Base and Deca mode with maximum 6.8Gbps bandwidth;
- Supports external trigger, free run mode and multiple modes;
- Supports Gamma correction, LUT and other ISP functions;
- Applies DC 24V power supply;
- Compatible with Cameralink protocol and GenICam standard;
- Comply with CE, FCC certifications.

Dimensions (mm)

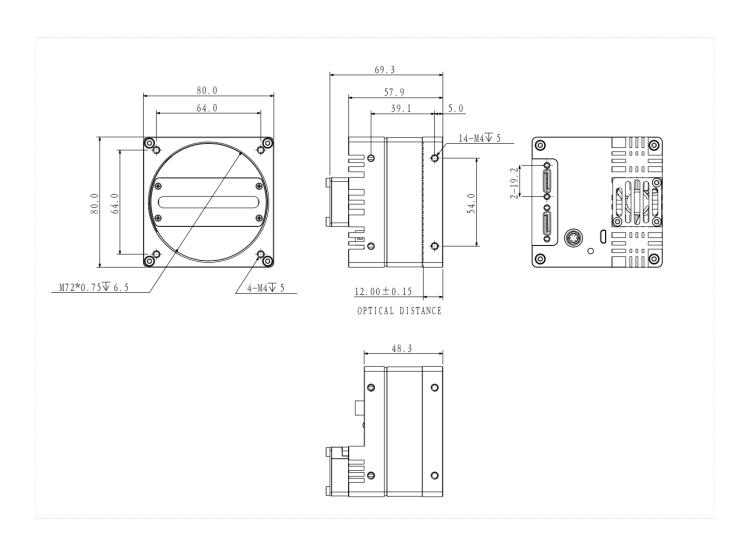




Specification

Model		L5087MK470E
Basic	Sensor	8 K
	Image Sensor	CMOS
	Shutter	Global
	Resolution	8192 × 4
	Line Rate	100 kHz
	Bit Depth	10
	Mono/Color	Mono
	Pixel Size	5 μm × 5 μm
	Pixel	8192×4
	S/N Ratio	40 db
	Dynamic Range	62 db
	Image Format	Mono8/10
	ROI	Support
Image	X Flip	Support
	Gain	1~32
	Gamma	From 0 to 4, support LUT
	Exposure Time	3 μs~100 ms
	Trigger Mode	Software Trigger/Hardware Trigger/Free Run Mode
	FPN	Support
	TDI Stages	single_line , 2TDI , 4TDI
Performance	User Setting	Support two sets of user-defined configurations
	Pixel Clock	34 51 68 85MHz
Port	Port	CameraLink
	Lens Mount	M72
Power	Power Supply	DC24V power supply
	Power Consumption	11.5 W
Structure	Product Dimensions	80 mm×80 mm×57.8 mm(Not including rear case connector)
	Net Weight	520 g
Environment	Storage Temperature	- 30°C~+80°C
	Operating Temperature	- 30°C∼+50°C

Connector Pin-out

Definitions of camera 6-pin ports:

Pin	Description	Features
1	Power	+ 24VDC power supply
2		not connected
3		
4		
5		
6	GND	Camera DC power ground

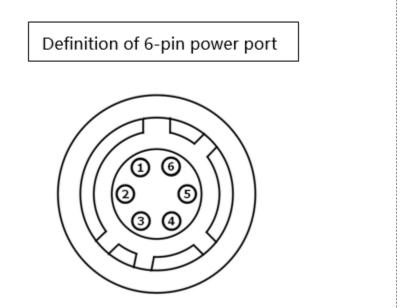

Spectrogram

