


LKK-CL-S-MDR-SDR-DM

Camera Link data cable (MDR to SDR), High Flex, PoCL

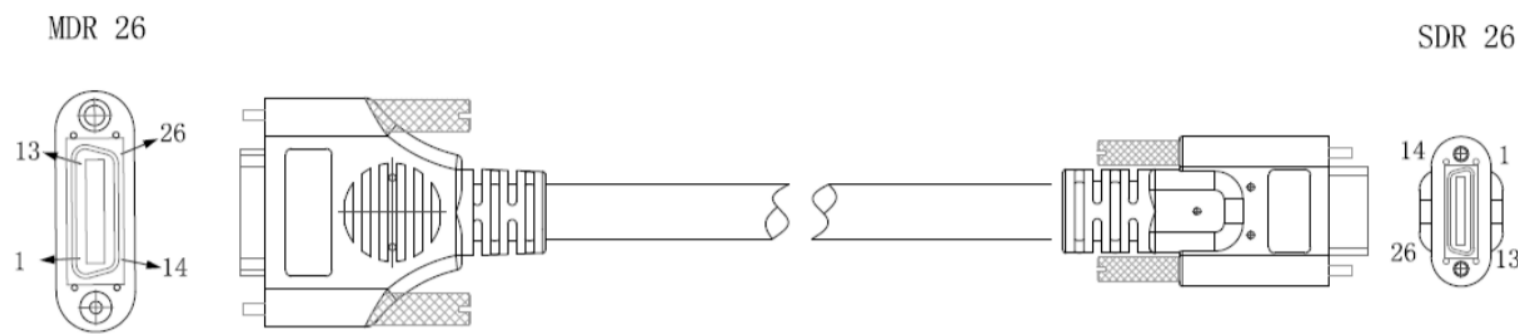

RoHS

Physical specifications			
Camera port interface	MDR 26	Host port interface	SDR 26
AWG	28 AWG	O.D	9.5±0.15 mm
Insulation materials	HD-PE/FM-PE+SKIN/SR-PVC		
Jacket material	MATT PVC	Jacket color	Black
Minimum bending radius	95 mm	Maximum bending cycle	10 million times
Tensile properties	50 N	Transmission speed	5 Gbps
Clock frequency	20MHz to 85MHz		
Electrical properties			
Voltage rating	30 V	Conductor Resistance	≤ 237.25 Ω/km
Environmental indicators			
Temperature rating	-20°C to 80°C		
Connector Specifications			
Plug	> 2000 plug cycle	Contact plating	Gold
Contact resistance	30 mΩ	Insulation Materials	PBT