


LKK-CXP-HDBNC-HDBNC-H-DM

High flex, CXP-12, HDBNC-HDBNC

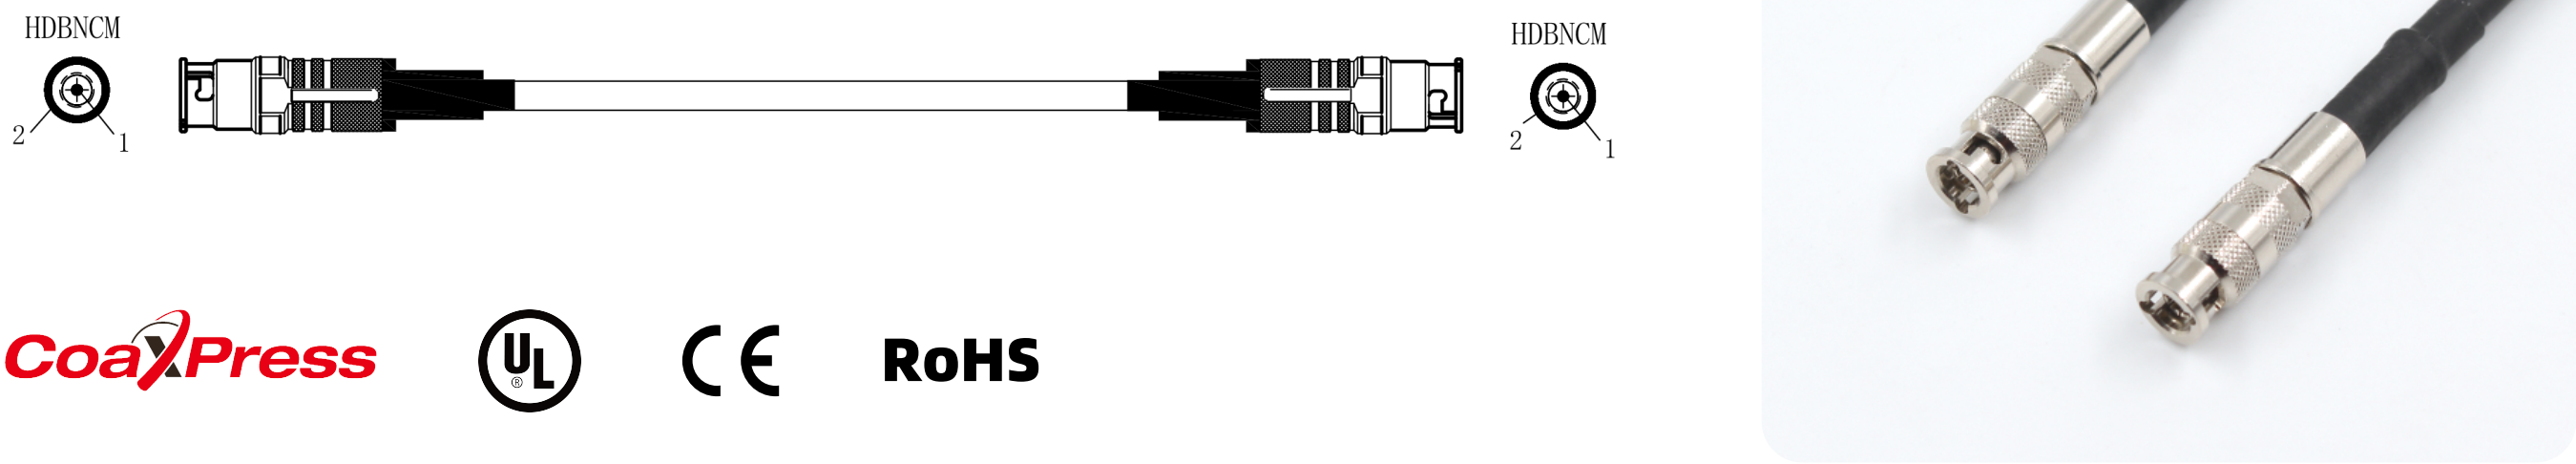

Physical specifications			
Connector Type End A	HDBNC		
Connector Type End B	HDBNC		
AWG	24 AWG	O.D	5.0 ± 0.2 mm
Insulation materials	SKIN-FOAM-SKIN	Jacket material	MATT PVC
Jacket color	Black	Minimum bending radius	50 mm
Maximum bending cycle	5 million times	Transmission speed	12.5 Gbps
Tensile properties	50 N		
Electrical properties			
Voltage rating	30 V	Conductor Resistance	≤93.25Ω/km
Environmental indicators			
Temperature rating	-20°C to 80°C		
Connector Specifications			
Plug	>500 plug cycle	Contact plating	Gold
Contact resistance	Between center contacts: <10 mΩ Between external contacts: <5 m Ω		