


LKK-U3-AM-Micro B-S-H-DM

High flex, USB 3.0 data cable supports power supply



US3
VISION

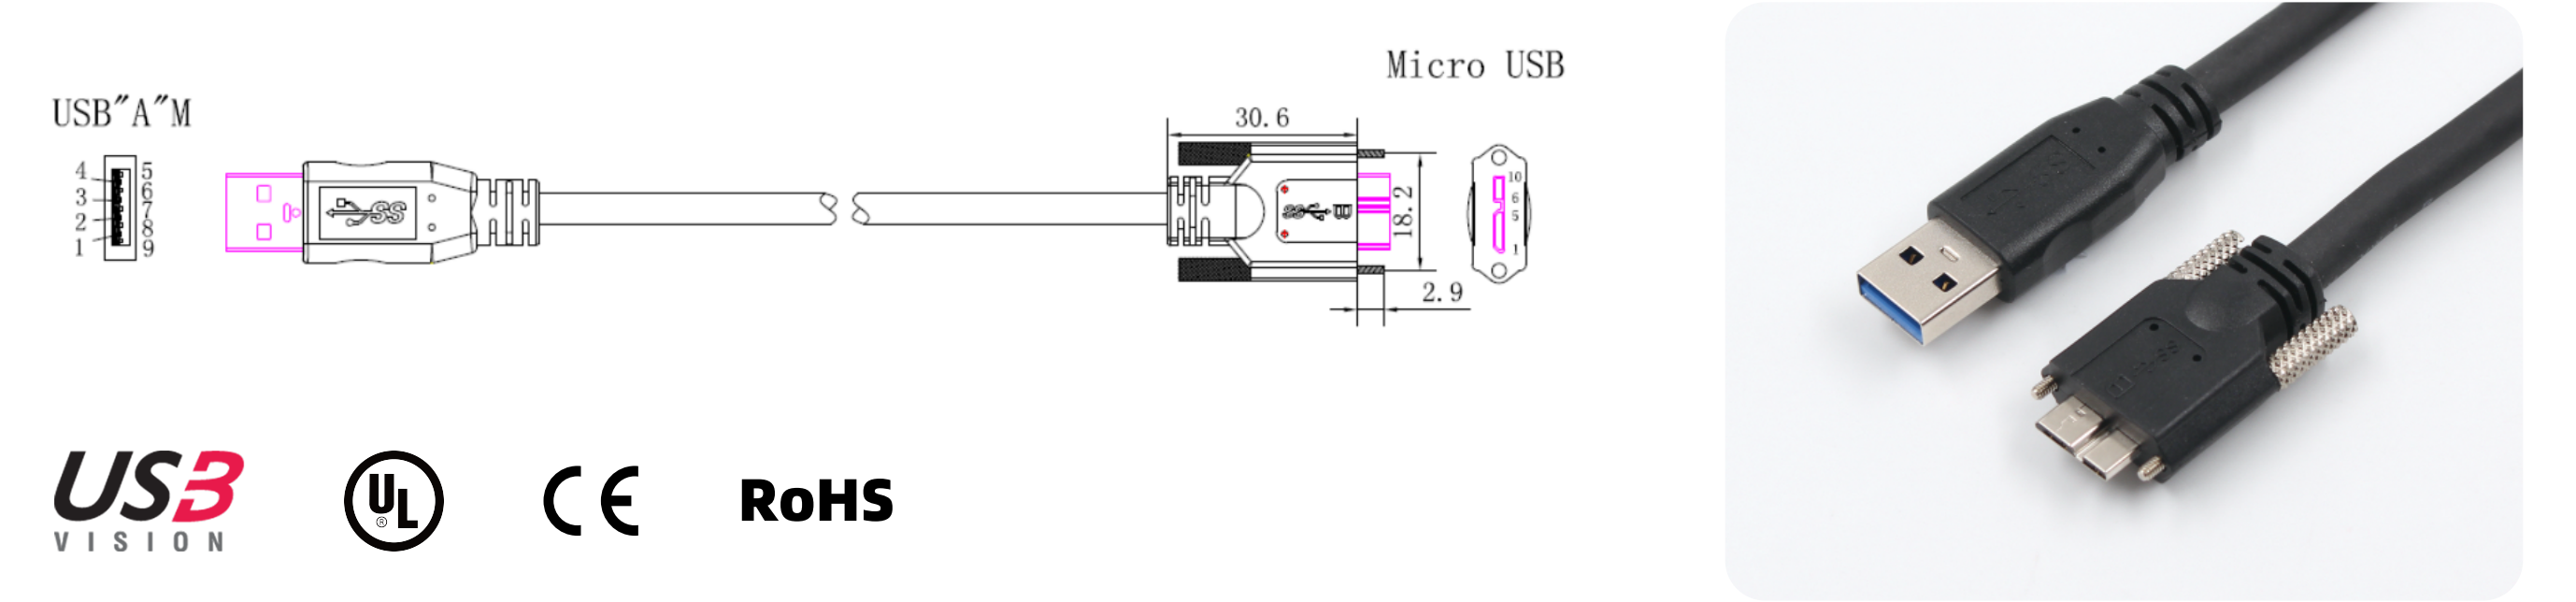



RoHS

Physical specifications			
Connector Type End A	USB 3.0 Micro B, Straight, with Thumbscrews		
Connector Type End B	USB 3.0 Type A		
AWG	26AWG/24 AWG	O.D	7.0 ± 0.3 mm
Insulation materials	HD-PE/FM-PE+SKIN/HD-PE		
Jacket material	MATT PVC	Jacket color	Black
Minimum bending radius	60 mm	Transmission speed	5 Gbps
Maximum bending cycle	3000 times	Tensile properties	50 N
Electrical properties			
Voltage rating	30 V		
Conductor Resistance	26AWG: ≤150Ω/km, 24AWG: ≤93.25Ω/km		
Environmental indicators			
Temperature rating	-20℃ to 80℃		
Connector Specifications			
Plug	> 3000 plug cycle	Contact plating	Gold
Contact resistance	30 mΩ	Insulation Materials	PBT