

# MV-GS1000

## 10 GigE Frame Grabber



GEN< i >CAM

10GiGE  
VISION

## Introduction

MV-GS1000 series 10 GigE frame grabber supports GigE Vision V2.0 protocol, and its SFP interfaces can be connected to 4 cameras at most via its pluggable SFP modules. According to different SFP modules, the frame grabber is applicable to 10 GigE industrial camera with RJ45 port or fiber optic interface.


## Available Model

MV-GS1004

## Dimension

## Key Feature

- Supports GigE Vision V2.0 protocol with each channel accessing up to 10 Gbps data transfer speed.
- Various indicators indicate frame grabber status in real time.
- Adopts multiple I/O connectors for input and output.
- Provides SDK for secondary development.
- Complies with GenIcam standard.

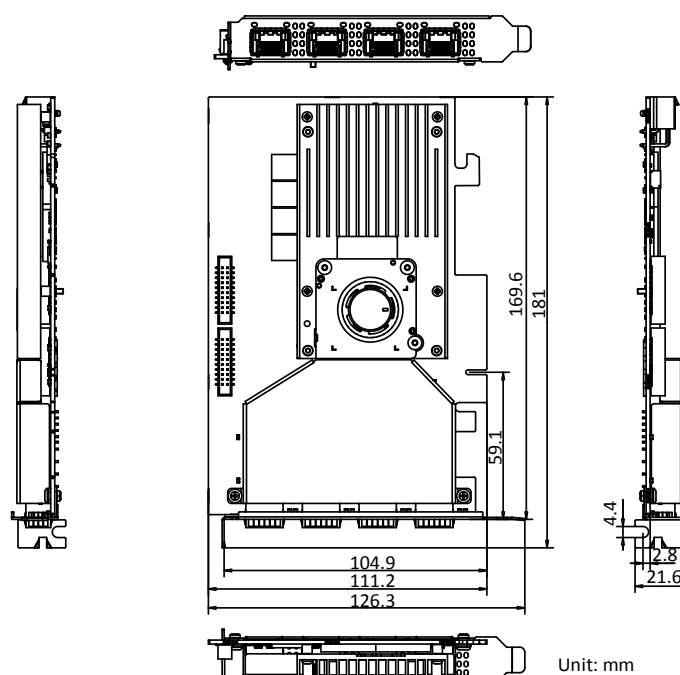

## Specification

<b>Model</b>	<b>MV-GS1004</b>
<b>Memory</b>	
<b>On-board memory</b>	2 GB DDR3-RAM
<b>Host interface</b>	
<b>Interconnect</b>	PCI-E gen2 × 8
<b>Delivery bandwidth</b>	3900 MB/s (max. transmission bandwidth) 3350 MB/s (sustained transmission bandwidth)
<b>Indicator</b>	1
<b>Camera interface</b>	
<b>Standard</b>	GigE Vision V2.0
<b>Interface</b>	SFP × 4
<b>Camera type supported</b>	10 GigE industrial camera
<b>Camera quantity supported</b>	4 at most (total bandwidth up to 27 Gbps)
<b>Camera connection speed</b>	10 Gbps
<b>Stream</b>	4
<b>Stream indicator</b>	4 pairs
<b>Processing feature</b>	
<b>Pixel format</b>	Mono 8/10/10p/12/12p Bayer 8/10/10p/12/12p YUV422Packed, YUV422_YUYV_Packed
<b>Jumbo frame</b>	9 KB
<b>GPIO</b>	
<b>I/O Type</b>	Provides 24 I/O connectors, including opto-isolated input × 4 (4.5 VDC to 28 VDC), opto-isolated output × 4 (4.5 VDC to 28 VDC), RX422 input × 4, TX422 output × 4, TTL input × 4, and TTL output × 4
<b>Connector</b>	Female header
<b>Electrical feature</b>	
<b>Power consumption</b>	Typ. 20 W
<b>Mechanical</b>	
<b>Dimension</b>	181 mm × 126.3 mm × 21.6 mm (7.1" × 5.0" × 0.9")
<b>Temperature</b>	Working temperature: 0 °C to 60 °C (32 °F to 140 °F) Storage temperature: -20 °C to 70 °C (-4 °F to 158 °F)
<b>Humidity</b>	10% RH to 95% RH (no condensation)
<b>General</b>	
<b>Client software</b>	MVS
<b>Operating system</b>	Windows 7/10/11
<b>Certification</b>	CE, KC