


GigE Interface Card


GT-6G10E

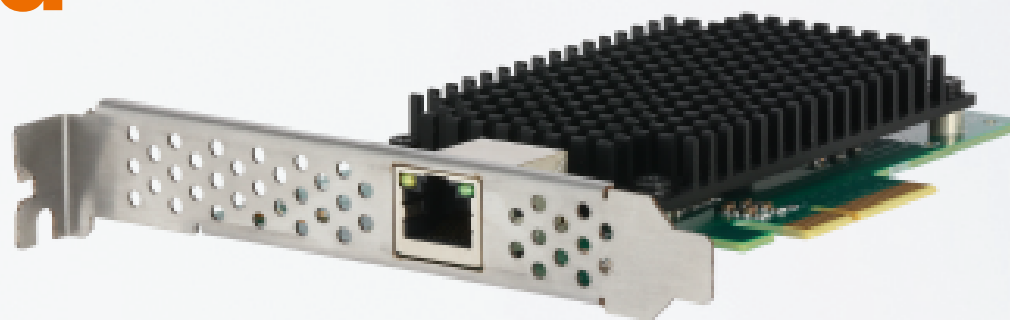

Features

- 10GigE frame grabber, the transmission rate can be up to 1000 Mbps/10000 Mbps.
- With 1 port, the bandwidth can be up to 10 Gbps.
- Supports IEEE 802.3 protocol.
- Conform to CE, UKCA, KC.

Dimensions (mm)

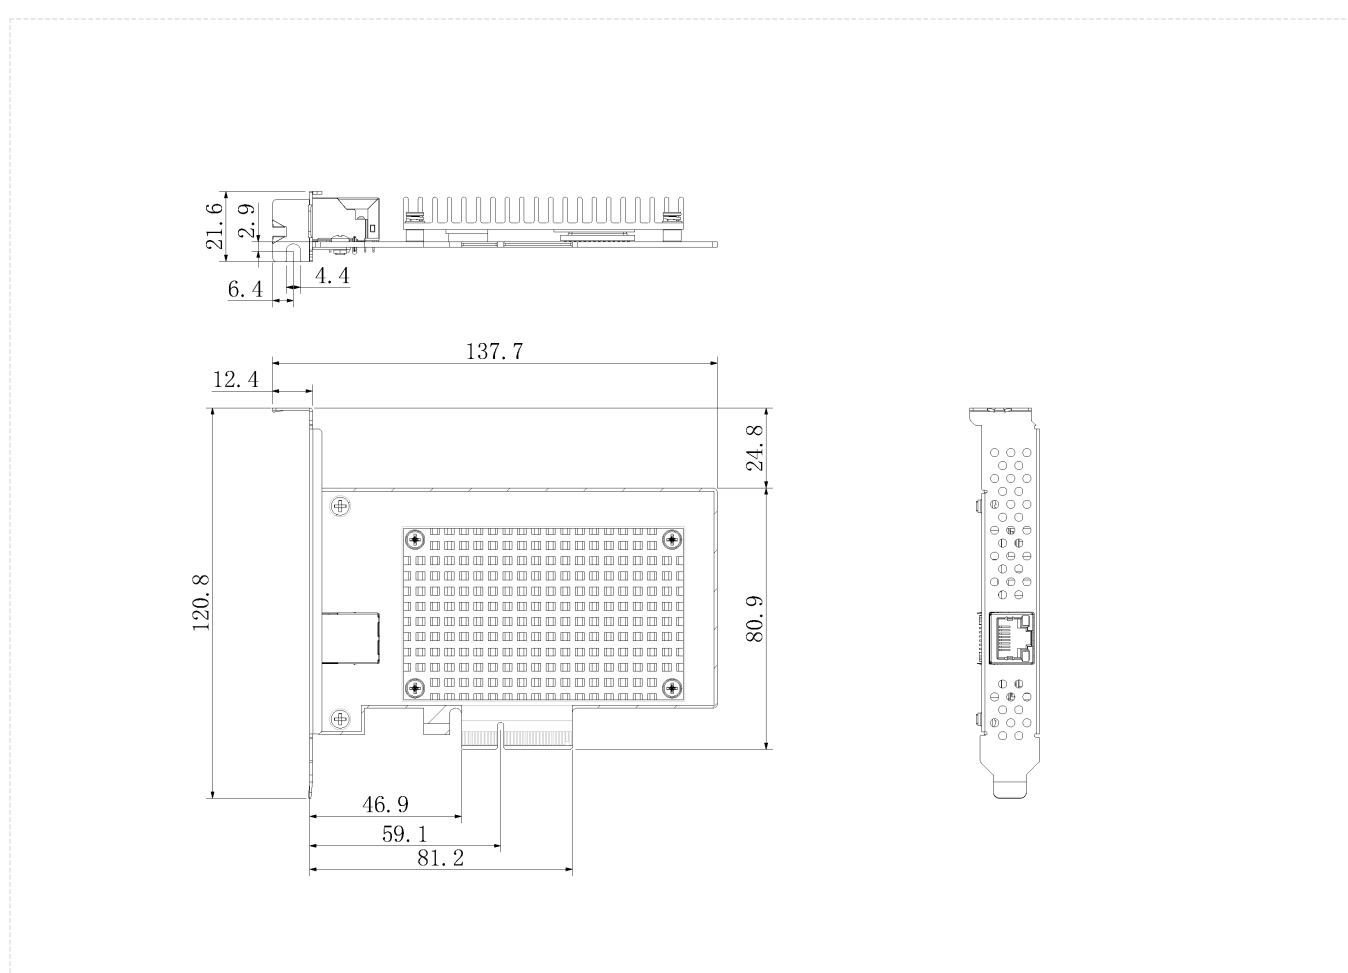

Specification

Model		GT-6G10E
Basic	Type	10GigE Frame Grabber
	Model	GT-6G10E
	Number of Channels	1 channel
	Protocol	IEEE802.3
	Camera Compatibility	10GigE industrial camera; GigE industrial camera
	Number of Cameras	Max 1 camera
Software	Operating System	Windows 7/10/11 64bits, Linux
Power	Power Supply	PCIe power supply
	Power Consumption	8W
Structure	Net Weight	113g
	Heat Dissipation	Natural cooling
Host interface	Host Bus Standard	PCIe Gen3 ×4
	Host Bus Link speed	8GT/s (PCIe 3.0)
	Delivery bandwidth	31.5 Gbps (Peak Bandwidth),10 Gbps (Sustained Bandwidth)
Port	Interface	RJ45 × 1
	Transfer Rate	1000 Mbps/10000 Mbps
Environment	Operating Temperature	0℃ ~ +60℃
	Storage Temperature	-20℃ ~ +70℃
	Operating Humidity	10% ~ 95%RH,Non-condensing
	Storage Humidity	10% ~ 95%RH,Non-condensing